
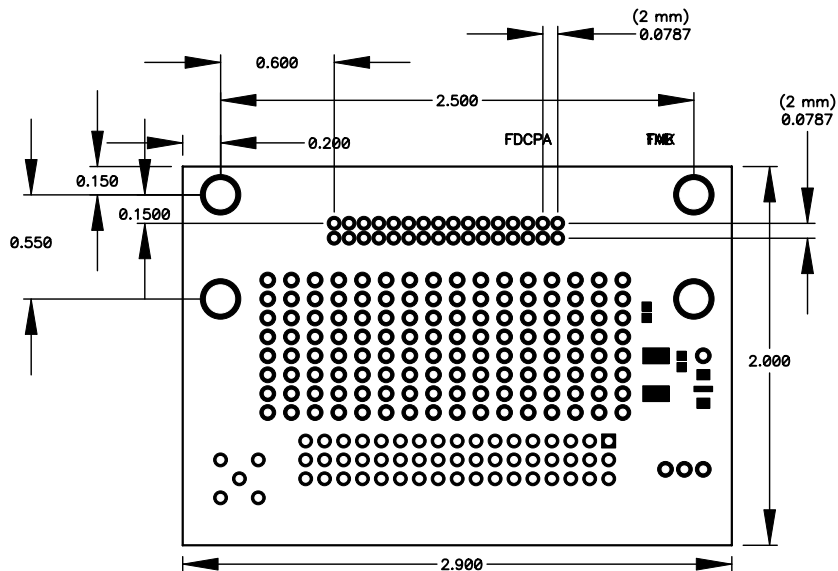
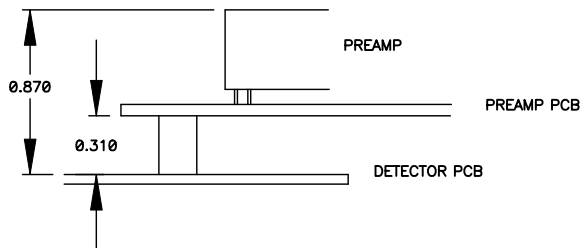


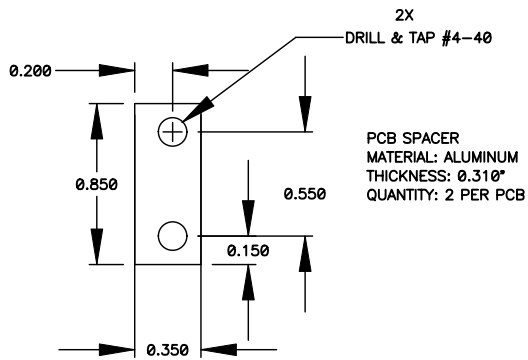

FDCPA SPECS:

- 2.9" X 2.0", 0.062" THICK, FR-4, 1 OZ. COPPER.
- 4 LAYER, SMOBC LPI GREEN.
- 0.008"/ 0.008" MIN. TRACE/ SPACE.
- Permanent Yellow Epoxy Silk-screen.
- SMT PADS: TOP 9
- PTH DRILLS

SIZE	Number
0.030"	32
0.038	188
0.150	4
- Front-to-Back registration less than 0.005"
- Warp and Twist 0.007" per inch or better.
- Layer Stack-Up

Silk Screen Top	TSK
Solder Mask Top	TMK
Top	TOP
IN1	IN1
IN2	IN2
Bottom	BOT
Solder Mask Bot	BMK